


HIGH PERFORMANCE POLYMERS RADITECK® P

Product based on Polyphenylene sulfide (PPS). High performance PPS compounds, featuring exceptional chemical and thermal resistance, as well as dimensional stability. Main applications in the automotive and electrical-electronic sectors along with consumer goods.



MATERIAL	COLOUR	BRIEF DESCRIPTION	APPLICATIVE DESCRIPTION
RADITECK® P RV400K	1700 NT	PPS 40% glass fiber reinforced injection molding grade. Heat stabilized. Natural colour.	Balanced matching of excellent chemical resistance, inherent flame retardancy and very good heat ageing properties retention. Suitable for parts requiring very high stiffness and high mechanical strength.
RADITECK® P RCM531K	1700 NT	PPS 53% glass fiber and mineral filler reinforced injection moulding grade. Lubricated and Heat stabilized. Natural colour.	Balanced matching of excellent chemical resistance, inherent flame retardancy and very good heat ageing properties retention. Suitable for parts requiring high stiffness and high mechanical strength, along with good dimensional stability and low warpage.
RADITECK® P RCMA651K	1700 NT	PPS 65% glass fiber and mineral filler reinforced injection. Lubricated, easier processing. Heat stabilized. Natural colour.	Balanced matching of excellent chemical resistance, inherent flame retardancy and very good heat ageing properties retention. Suitable for parts requiring high stiffness and high mechanical strength, along with good dimensional stability and low warpage. Ease of processing thanks to good flowability.
RADITECK® P ERVA400K	1700 NT	PPS 40% glass fiber reinforced injection molding grade. Toughened, easier processing. Heat stabilized. Natural colour.	Balanced matching of excellent chemical resistance, inherent flame retardancy and very good heat ageing properties retention. Suitable for parts requiring improved impact strength along with high stiffness and high mechanical resistance. Ease of processing thanks to good flowability.
RADITECK® P ERV400K	1700 NT	PPS 40% glass fiber reinforced injection molding grade. Toughened, heat stabilized. Natural colour.	Balanced matching of excellent chemical resistance, inherent flame retardancy and very good heat ageing properties retention. Suitable for parts requiring improved impact strength along with high stiffness and high mechanical resistance.

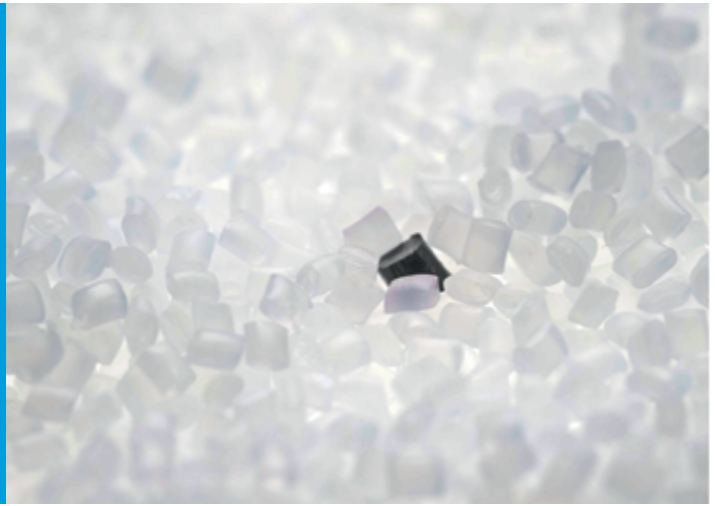



HIGH PERFORMANCE
POLYMERS

Global Presence

RADICI NOVACIPS SpA

Via Bedeschi, 20 – 24040 Chignolo d'Isola (BG) – IT
Ph. +39 035 4991311 – Fax +39 035 994386
e-mail: italia.plastics@radicigroup.com

RADICI NOVACIPS SpA

Via Provinciale, 1331 – 24020 Villa d'Ogna (BG) – IT
Ph. +39 0346 22453 – Fax +39 0346 23730
e-mail: italia.plastics@radicigroup.com

RADICI PLASTICS GmbH

Glockengiesserwall 2 – 20095 Hamburg – DE
Ph. +49 40 3095410 – Fax +49 40 30954199
e-mail: rplde.info@radicigroup.com

RADICI PLASTICS IBERICA SL

Avda. Josep Tarradellas, 130 5^o1^a
08029 Barcelona – ES
Ph. +34 93 5416500 – Fax +34 93 4943326
e-mail: iberica.plastics@radicigroup.com

RADICI PLASTICS UK Ltd.

7 Langham House - 148 Westgate
Wakefield, England WF2 9SR - UK
Ph. +44 (0)20 7431 4554
e-mail: uk.plastics@radicigroup.com

RADICI PLASTICS LTDA

Rua Giuseppe Marchiori, 497
CEP 18147-970 Araçariçuama – São Paulo – BR
Ph. +55 11 4136 6500
e-mail: brasil.plastics@radicigroup.com

RADICI PLASTICS FRANCE SA

65, Rue du Dauphiné – 69800 St. Priest – FR
Ph. +33 4 72782090 – Fax +33 4 72782089
e-mail: france.plastics@radicigroup.com

RADICI PLASTICS USA Inc.

960 Seville Road, Wadsworth, OH 44281 – USA
Ph. +1 330 3367611 – Fax +1 330 3355029
e-mail: usa.plastics@radicigroup.com

RADICI PLASTICS (Suzhou) CO., LTD.

No. 49 Ping Sheng Road, SIP
215126 Suzhou, Jiangsu Province – PR China
Ph. +86 512 62952290 – Fax +86 512 62952291
e-mail: china.plastics@radicigroup.com

RADICI PLASTICS INDIA PVT. LTD.

501, DLF Tower, Shivaji Marg
New Delhi - 110015 – IN
Ph. +91 11 41638 170
e-mail: info.plastics@radicigroup.com

RADICI PLASTICS MEXICO S. DE R.L. DE C.V.

Av. Francisco Zarco 2688
C.P. 47810 - Col. Loma Bonita - Ocotlán Jalisco – MX
Ph. +52 392 923 2390
e-mail: info.plastics@radicigroup.com

The information provided in this document corresponds to our knowledge on the subject as of the date of publication. The information may be subject to revision as new knowledge and experience become available. Data provided fall within the normal range of product properties and relate only to the specific designated material. The data may not be valid for such material if used in combination with any other material or additive, or in any process, unless otherwise expressly indicated. The data provided should not be used to establish specification limits. Such data are not intended to substitute for any testing you may need to conduct to determine the suitability of a specific material for particular purposes.

Since RadiciGroup High Performance Polymers cannot anticipate all the variations occurring in end-use conditions, RadiciGroup High Performance Polymers makes no warranties and assumes no liability in connection with any use of the above information.

Nothing in this publication is to be considered as a licence to operate under, or a recommendation to infringe, any patent rights.