

**DATA SHEET / SPECIFICATIONS**  
**ANTI UV MASTERBATCH**  
**UV 29**

UV 29 is a blend of polymeric HALS additives in a MFI 7 LDPE carrier.

**SPECIFICATIONS**

<i>Anti UV content %</i>	<i>9.0 –11.0</i>
<i>Appearance</i>	<i>Pellets slightly yellow</i>
<i>Bulk density</i>	<i>About 0.50</i>


**USAGE**

UV 29 contains additives with very low volatility and can be used in both cast and blown film processes.

It can be used with all types polyolefines LDPE, LLDPE, EVA and other copolymers, and also PP. Addition of filler ( kaolin, titanium oxide ...) can modify the ageing characteristics.

**RECOMMENDED ADDITION RATES**

The table hereafter gives some recommendations of use :

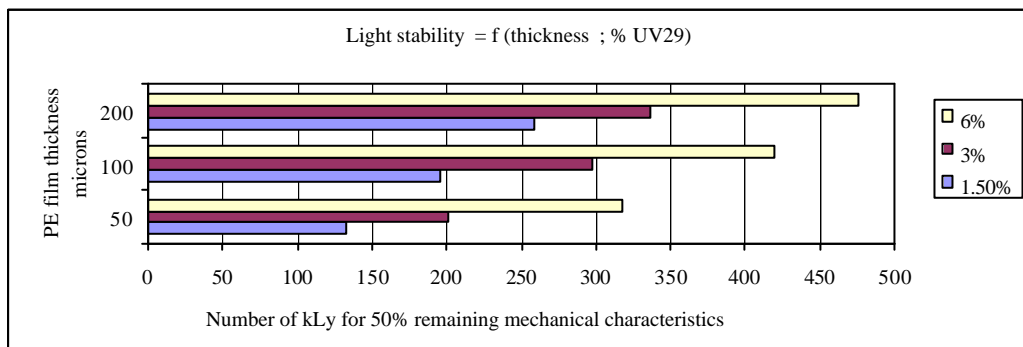

**PACKAGING**

Product is packed in 25 kg PE bags on a 1375 kg shrink-wrapped pallet.  
 UV29 must be stocked secure from the sun and from the heat exposure.